TOSUN

CAN/CANFD
TOSUN
TC201
CAN Trigger
DC 8-15V
Power
DUT
CAN/CANFD
TC201
Trigger Out
OSC
Trigger Out
DC 8-15V

CAN/CANFD
TOSUN
TC201
CAN Trigger
DC 8-15V
Power
DUT
CAN/CANFD
TC201
Trigger Out
OSC
Trigger Out
DC 8-15V

Parameter		Test Condition	Minimum Value		Maximum Value	Unit
	External DC power supply	CAN trigger				V
	External DC power supply	CAN trigger	--		--	A
	External DC power supply	CAN trigger	--		--	W
CAN Interface	Bus pin voltage resistance	CANH CAHL	-		--	

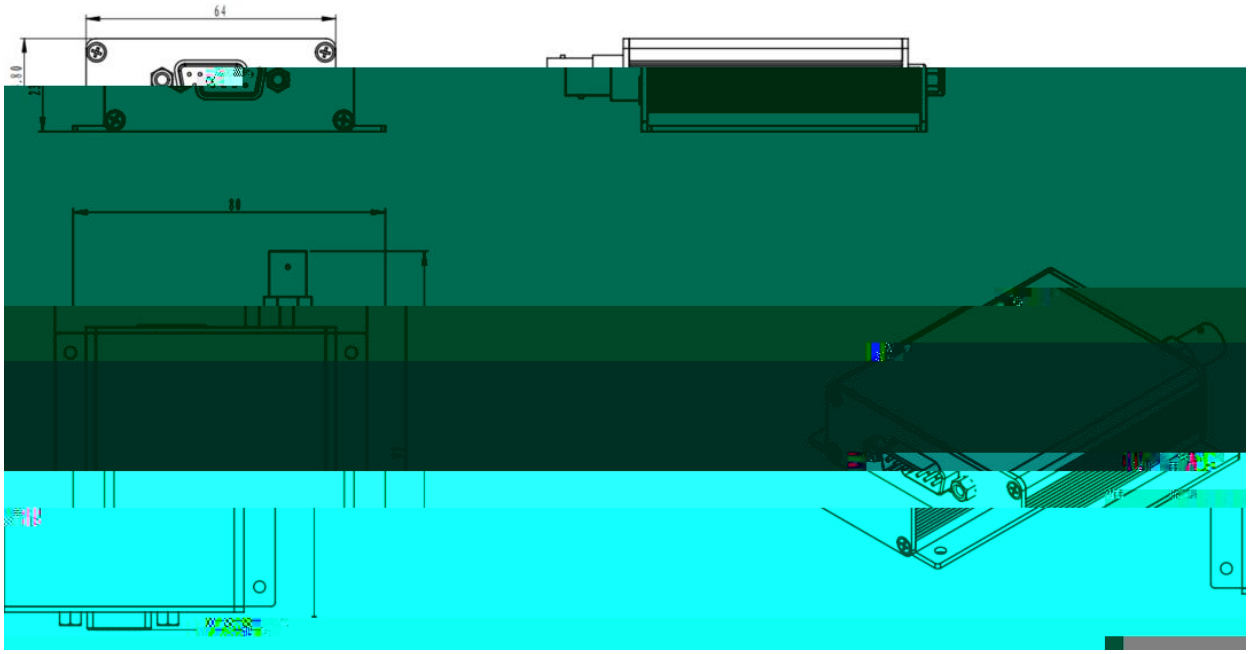
64
11

CAN/CANFD
TOSUN
TC201
CAN Trigger
Trigger Out
DC 8-15V



Trigger Out
DC 8-15V

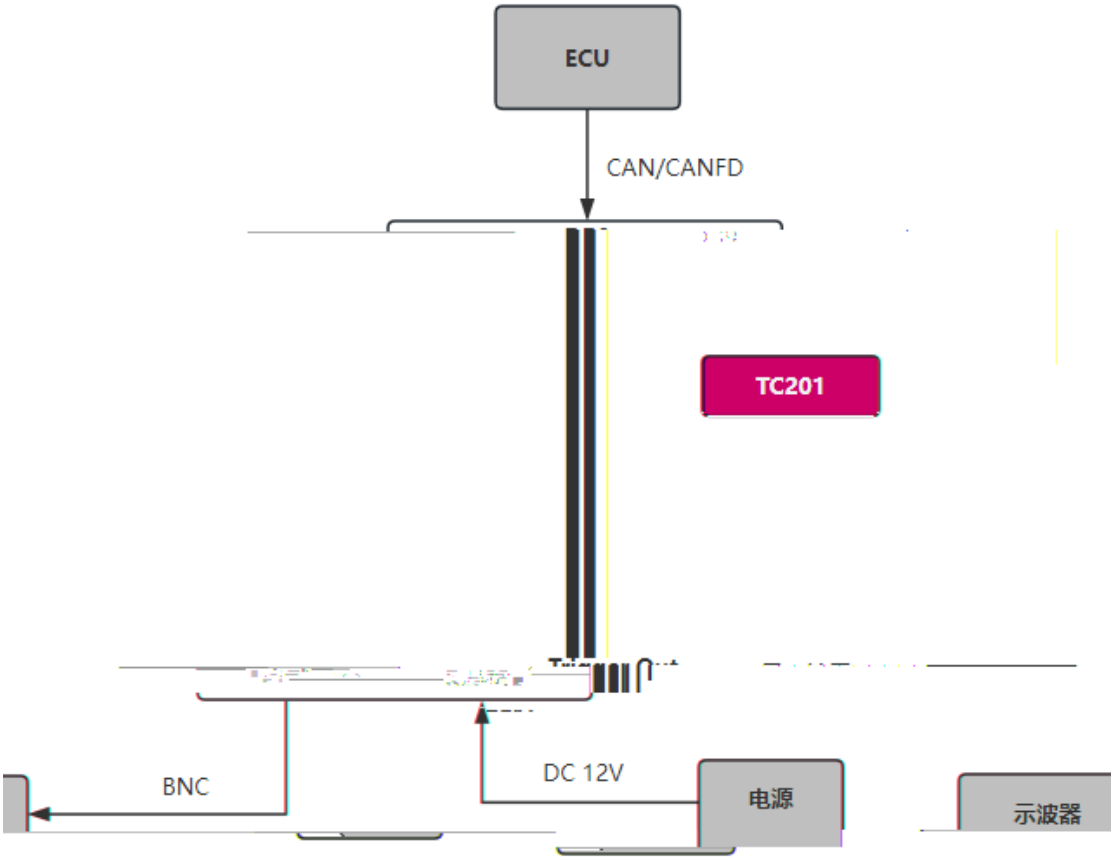
ECU
CAN/CANFD
TC201
BNC
DC 12V
电源
示波器

-

-

(1)

-

(2) -

- -

-

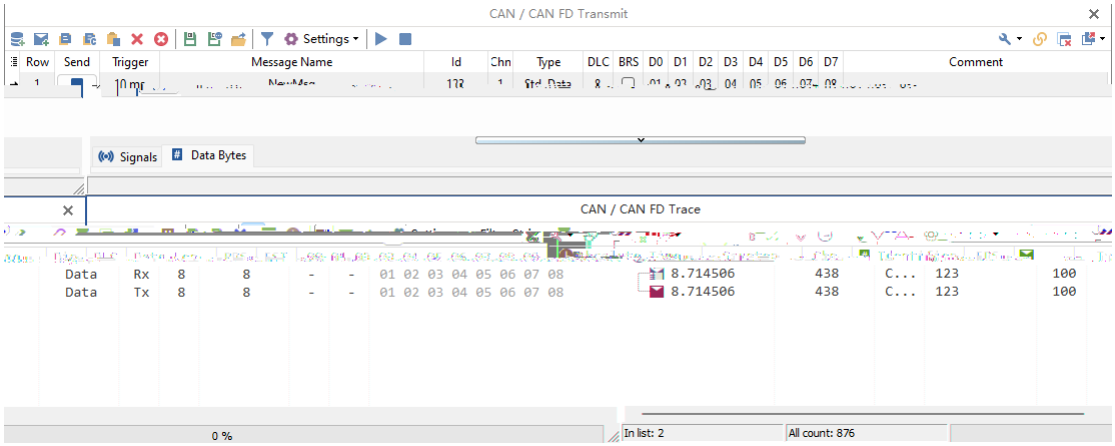
CAN / CAN FD Transmit
Settings
Row
Send
Trigger
Message Name
Id
Chn
Type
DLC
BRS
D0
D1
D2
D3
D4
D5
D6
D7
Comment
Signals
Data Bytes
CAN / CAN FD Trace
Data Rx 8 8 - - 01 02 03 04 05 06 07 08 8.714506 438 C... 123 100
Data Tx 8 8 - - 01 02 03 04 05 06 07 08 8.714506 438 C... 123 100
0 %
In list: 2
All count: 876

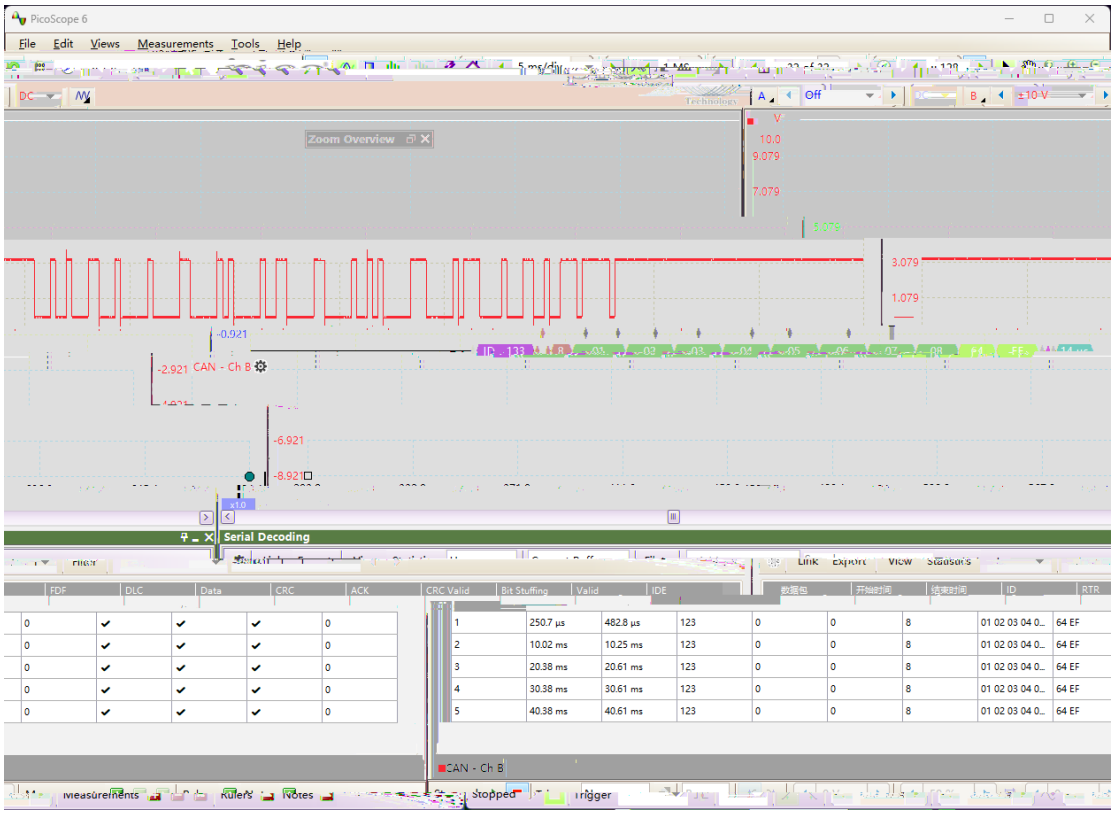
PicoScope 6
File
Edit
Views
Measurements
Tools
Help
Zoom Overview
CAN - Ch B
Serial Decoding
FDF
DLC
Data
CRC
ACK
CRC Valid
Bit Stuffing
Valid
IDE
ID
RTR
1 250.7 µs 482.8 µs 123 0 0 8 01 02 03 04 0... 64 EF
2 10.02 ms 10.25 ms 123 0 0 8 01 02 03 04 0... 64 EF
3 20.38 ms 20.61 ms 123 0 0 8 01 02 03 04 0... 64 EF
4 30.38 ms 30.61 ms 123 0 0 8 01 02 03 04 0... 64 EF
5 40.38 ms 40.61 ms 123 0 0 8 01 02 03 04 0... 64 EF
Measurements
Rulers
Notes
Stopped
Trigger